



# 48HTB

# PS/ULTIMA

## BUTYL PEEL & STICK UNDERLAYMENT

*“Premium Butyl High-Temp Self-Adhered Roof Deck Protection – Under Metal, Tile, Slate, Shakes, and Asphalt Shingles”*

**Weather Tight Head-lap...**  
protecting building assets!

- **Engineered Construction...** extremely strong polypropylene surface with UV and weather resistive coatings that add water shedding redundancy in the roofing system while protecting the structure from damage
- **Advanced Surface Technology...** SecureWalk™ (top) creates incredible walkability
- **All Temperature Performance...** -40° F to 280° F; all climates, under all roofing styles
- **Weather-Tight Seal...** exclusive SecureLap™ system providing exceptional sealing
- **Durable...** heavy synthetic surface resists tearing during roof installation; UV stabilized surface resists UV degradation up to six months
- **100% Inorganic Surface...** synthetic construction offers long term moisture protection - won't rot and is inert to mold growth
- **Non-Woven “Cool Color” Surface...** stays cool and maximizes dimensional stability
- **Premium Adhesive Formulation...** butyl adhesive protects from the effects of severe Wind-Driven Rains, Water, Snow and Ice Damming.
- **Easy Peel Dual Film Technology...** allows for quick and simple release liner removal and underlayment installation

### Description

**CMI SecureGrip PS/ULTIMA 48HTB** Self-Adhered Roof Underlayment is designed and manufactured to be a secondary water barrier in sloped roof system construction where toughness and longer exposures may be required. **SG PS/ULTIMA 48HTB** is an air, water and vapor barrier and must be installed only above properly ventilated spaces.

### Uses

A superior performing self-adhered roof underlayment used under metal, tile, slate, shakes, and asphalt shingle roofing.

### Storage

**SecureGrip PS/ULTIMA 48HTB** should be stored at temperatures between 20° F and 90° F, upright in the original cardboard box package in a dry and properly ventilated area.

### Availability

**SecureGrip PS/ULTIMA 48HTB** is available throughout the United States. Check with your local representative for product availability.

**48HTB PS/ULTIMA**  
BUTYL PEEL & STICK UNDERLAYMENT

**PREMIUM SELF-ADHERED UNDERLAYMENT**  
For Protection from Wind-Driven Rain, Hail, Snow and Ice Damming  
For use under all Shingle, Shake, Metal, Slate and Tile Roofing  
For High Temperature Installation

Meets or Exceeds ASTM D1970

Class # Flex - ASTM D1970

Meets Class # Peel Rating


All Temperature Performance

Non-Flammable, Non-Toxic, Non-Hazardous

Non-Hazardous and Easy to Handle

Meets or Exceeds ASTM D1970

SecureGrip PS/ULTIMA 48HTB Technical Data		
Attribute	Test Standard	SecureGrip PS/ULTIMA 48HTB Typical Values
Surface Color		Cool Green Color
Surface Type		'Easy Walk' Non-Woven Synthetic Polymer
Reverse Side Release Surface		Silicon Treated Poly Split-Release Film
Weight per Square		13 lbs (5.9 kg)
Nail Sealability	ASTM D1970	Pass
Permeability	ASTM E96	0.034
Nominal Thickness	ASTM D5147	28 mils (.7mm)
Tensile	ASTM D1970	MD 131 lbs/in / CD 167 lbs/in
Low Temp Flexibility	ICCAC 48	Pass
Tear Resistance	ASTM 1970	MD 197 lbf / CD 224 lbf
Adhesion to Plywood	ASTM D903	4° F 70 lbs/ft / 23° F 66 lbs/ft

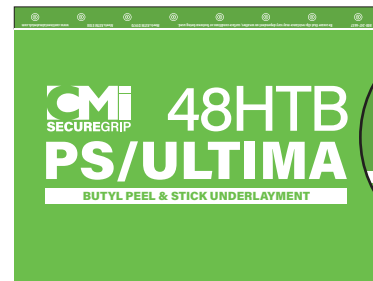

SECURELAP™ TECHNOLOGY

### SecureGrip PS/ULTIMA 48HTB Roll Specifications

Length Per Roll	125' (38.1 m)	Rolls Per Pallet	25
Width Per Roll	48" (1.2 m)	Pallet Weight	1,731 lbs (785.1 kg)
Weight Per Roll	65 lbs (29.6 kg)	UV Resistance	365 days
Gross Roll Size	500 sq ft (46.5 m)		

### Compliance Codes

Meets the Requirements of ASTM D1970  
U.L. Classified as a Prepared Roofing Accessory

### Notes

Below 40° F blind nailing at top and side laps recommended.  
Use of primer and blind nailing at top and side laps suggested at 0° F.



Made in the U.A.E.



@cmi1958